


Drawings

Model 93026 Carrying Case

Unit: mm

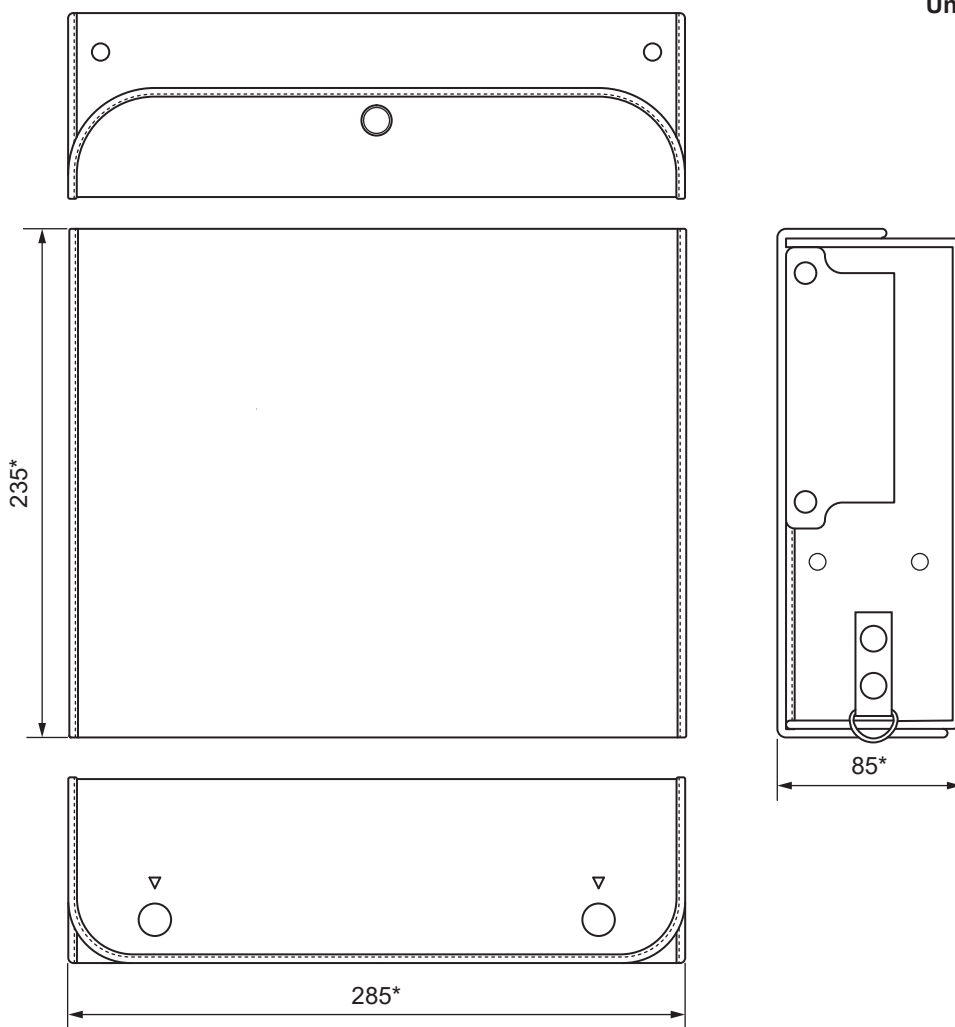

*: Auxiliary (reference) dimension

With a shoulder belt

If not specified, the tolerance is $\pm 3\%$. However, in cases of less than 10 mm, the tolerance is ± 0.3 mm.