


AQ2200 Series

Multi Application Test System

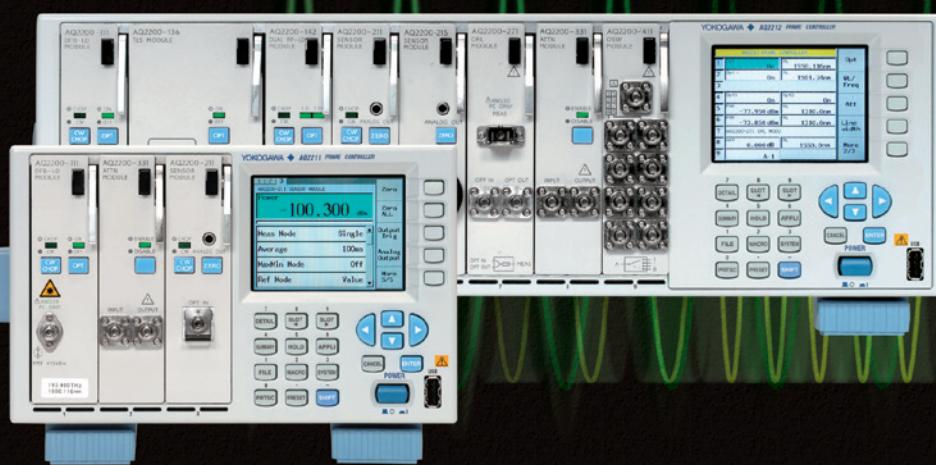

Ideal Measurement Solution for Optical Devices and Optical Transmission Systems

■ A broad lineup of measurement modules

Light source, Optical power meter, Optical attenuator, Optical switch, etc.

■ Macro programming Function

Convenient solution for automated measurements eliminating need for an external PC controller.

■ Remote interfaces : GP-IB, Ethernet, and USB

■ Hot-swappable modules

For more information, go to

tmi.yokogawa.com

Test & Measurement Instruments



Ideal Measurement Solution for Optical Devices and Optical Transmission Systems

The AQ2200 Multi Application Test System is the ideal system for measuring and evaluating a wide range of optical devices and optical transmission systems. A variety of measurement modules are available, including the following: high-stability light sources, high-speed optical sensors, high-resolution variable optical attenuators and optical transceiver interfaces. These modules can be installed in any combination on a single platform, providing an ideal measurement system for a variety of applications.

The AQ2200 Multi Application Test System is available in two different frame controller platforms. Each model has a certain number of slots for housing modules, so you can select the best platform size for your measurement application.

Frame and Module Lineup

Frame Controller

- AQ2211 Frame controller (3 slots)
AQ2212 Frame controller (9 slots)

Light Source Module

- AQ2200-111 DFB-LD module (1310nm, 1490nm, etc.)
AQ2200-131 Grid TLS module (C/L band, 1 channel)
AQ2200-132 Grid TLS module (C/L band, 2 channels)

Sensor Module

- AQ2200-221 Sensor module (long wavelength, 2 channels)
AQ2200-215 Sensor module (high power +30 dBm)

Optical Attenuator Module


- AQ2200-311A ATTN module (standard, monitor output option)
AQ2200-331 ATTN module (with a built-in optical power meter)

Optical Switch Module


- AQ2200-421 OSW module (1x2 or 2x2, 2 channels)
AQ2200-411 OSW module (1x4 or 1x8)
AQ2200-412 OSW module (1x16)

Modules for Optical Transceiver

- AQ2200-642 Transceiver interface module
AQ2200-651 SG module

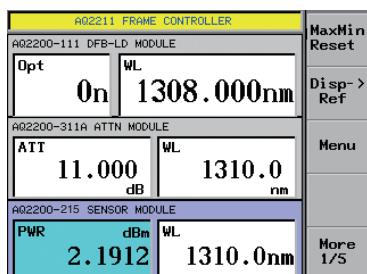

AQ2211 Frame Controller Screen (SUMMARY)

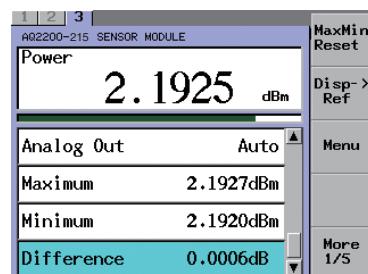

AQ2211 Frame Controller Screen (DETAIL)

Frame controller with convenient functions

◆Hot-swappable

Measurement modules can be inserted or removed without turning off the power. This hot-swapping capability makes it easier to reconfigure your system.

◆USB storage

The USB makes it easy to quickly save and load data. It saves measurement data in CSV and a screen shot in bmp, so that they can easily be imported into almost any PC application.

◆Multi user function

Up to 5 users can access to the same frame controller simultaneously.
This function contributes to cost-saving and space-saving by sharing a frame.

◆Various remote interfaces

The AQ2211 and AQ2212 frame controllers are equipped with not only IEEE488.2 compliant GP-IB but also Ethernet and USB for remote operation.

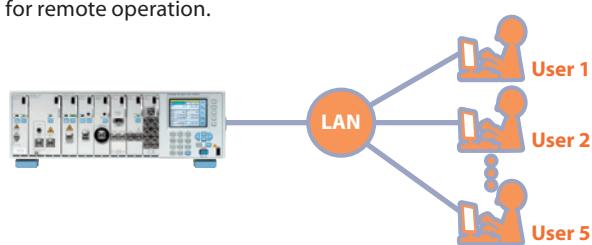


Image of Multi user function

Powerful Features for Automated Testing


Macro Programming Function

A macro program function makes it easy to build a simple automated measurement system by writing a series of operations in a program, setting measurement conditions, changing test configurations in combination with multiple modules, executing measurements, and saving results.

Step 1: Create a macro program using Macro editor, a PC application software.

Step 2: Install the macro program into Frame controller via GP-IB, Ethernet, or USB.


Step 3: Execute the macro program on the frame controller.

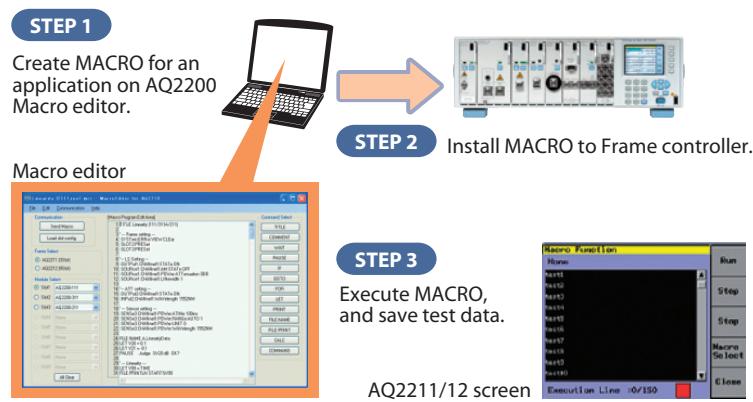

*The Macro editor (free software) can be downloaded from our web site.

Remote Viewer Software

The remote viewer software, a free PC application software, enables the AQ2200 Multi-Application Test System to be controlled from your PC via the Ethernet interface. When starting the software and setting up the connection properly, the front panel image of the connected frame controller is displayed on your PC monitor. Using a mouse, you can control the remote frame controller from your PC through operations that are similar to those for the front panel keys of the instrument. It is useful in case that you cannot see or operate the frame directly for the frame being mounted high up in the test stand.

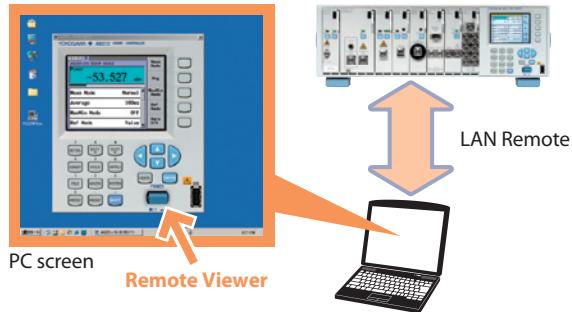

*The remote viewer software (free software) can be downloaded from our web site.

Stability / Logging Function


Stability and logging measure fluctuation in optical power.

• Stability Measurement

By measuring the optical signal over a long period of time, you can check the optical power stability up to 99days.

• Logging Measurement

By measuring an optical signal that fluctuate over very short periods of time, you can check the transient fluctuation or response with min. 100 μ s intervals.

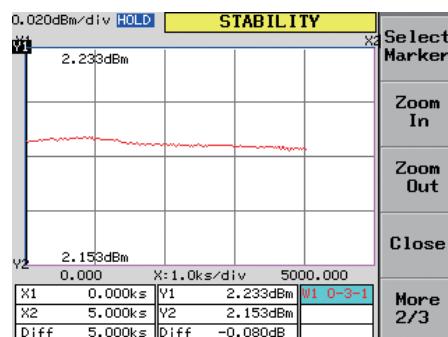

Graph Display Screen

Module Lineup

Optical Power Meter Improved measurement throughput

High-Power (AQ2200-215)

- High power measurement: +30 dBm
- Power range: -70 to +30 dBm
- Averaging time: 100 µs (minimum sampling intervals)



Dual-Channel (AQ2200-221)

- Compact: Two high-performance sensors in a module.
- Power range: -70 to +10 dBm
- Averaging time : 200 µs (minimum sampling intervals)



Light Source

DFB-LD Light Source (AQ2200-111)


- Wavelength: 1310 nm, 1490 nm
- Wavelength stability:
± 0.005 nm or less
- Output level stability:
± 0.005 dB or less



Note: Other wavelengths are also available on request

Grid Tunable Laser Source (AQ2200-131/132)

- Frequency (Wavelength) range:
C/L-band
- 1 and 2 channel modules
- Grid spacing:
Standard type: min. 50 GHz (0.4 nm)
Advanced type: min. 25 GHz (0.2 nm) and
manual (0.1 GHz)
- Dither function (Advanced type only)

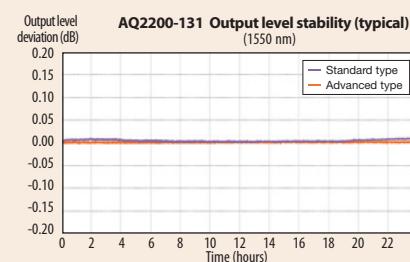

Optical Attenuator Providing low insertion loss


Standard type (AQ2200-311A)

- Low insertion loss: 1.0 dB (typ.)
- Wide attenuation range:
0 to 60 dB (in steps of 0.001 dB)
- Wide wavelength range:
1200 to 1700 nm
- Monitor output (optional)
- Low polarization dependence loss:
0.1 dBp-p or less



ATTN w/ Built-in Optical Power Meter (AQ2200-331)

- Attenuation accuracy: within ±0.1 dB
- The output monitor function allows for directly setting the optical power
- SMF (10/125 µm) or MMF (62.5/125 µm)

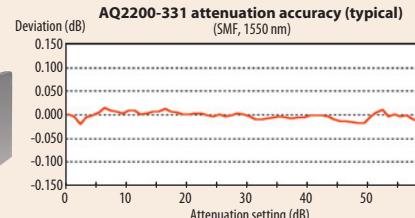


Optical Switch Superior switching reproducibility

1x2, 2x2 Dual Optical Switch (AQ2200-421)

- Compact: Two optical switches in a one-slot size module
- Supports SMF (10/125 µm) or MMF (62.5/125 µm)
- Low insertion loss: 1.0 dB (typ.)
- Switching reproducibility:
±0.01 dB



AQ2200-421 OSW switching reproducibility (typical)
(SMF, 1x2, 1550 nm)

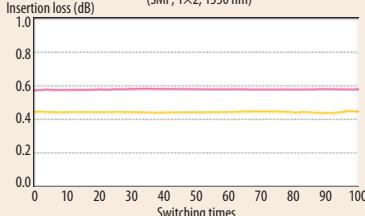


1x4, 1x8 Optical Switch (AQ2200-411)

- SMF (10/125 µm) or MMF (62.5/125 µm)
- Switching reproducibility:
±0.01dB
- Low insertion loss: 1.0 dB (typ.)



AQ2200-411 OSW switching reproducibility (typical)
(SMF, 1x8, 1550 nm)

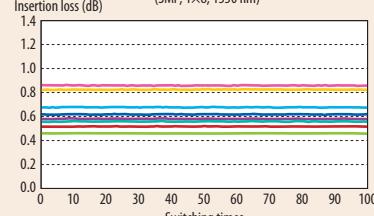


1x16 Optical Switch (AQ2200-412)

- SMF (10/125 µm)
- Switching reproducibility:
±0.01dB
- Low insertion loss: 1.0 dB (typ.)



AQ2200-412 OSW switching reproducibility (typical)
(SMF, 1x16, 1550 nm)

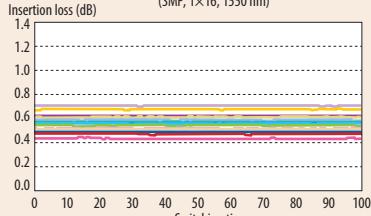

Optical Transceiver Test Simplifying 10G transceiver test environment

Transceiver I/F module (AQ2200-642)

- Compatible with XFP, SFP+, XENPAK, etc.
- Power supply and current monitor
- I²C/MODIO interfaces
- Control signal transmission
- Status signal monitor
- Resistance value monitor



SG module (AQ2200-651)

- RF output : 5 channels
- Clock output : 620.0 to 720.0 MHz
155.0 to 180.0 MHz
- 10 MHz reference input and output



Measurement Applications


3-wavelength Optical Filter Measurement System for GE-PON

A 3-wavelength optical filter for GE-PON splits 1490 nm and 1550 nm optical signals, and pass a 1310 nm optical signal in the return direction.

This measurement system measures the insertion losses of wavelengths passing between ports and the isolation of wavelengths blocked.

[Measurement items]

- Insertion loss: (1) to (2) 1490 nm, (1) to (3) 1550 nm, (2) to (1) 1310 nm
- Isolation: (1) to (2) 1550 nm, (1) to (3) 1490 nm, (2) to (3) 1310 nm

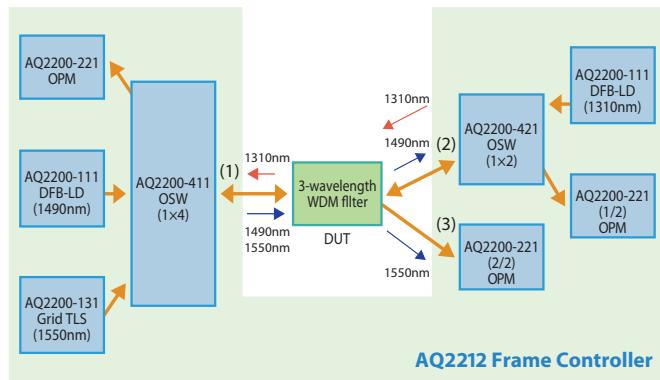

Optical Fiber Amplifier Measurement System


An optical fiber amplifier is an indispensable device for WDM transmission systems. This measurement system characterizes gains and noise figures (NF) of the fiber amplifier by measuring input light to an optical fiber amplifier, which was multiplexed using multiple light sources, as well as amplified output light with an optical spectrum analyzer. A high-power sensor allows for measuring total output power.



AQ6370C Measurement Screen


[Measurement items]

- Gain, NF, and total output power

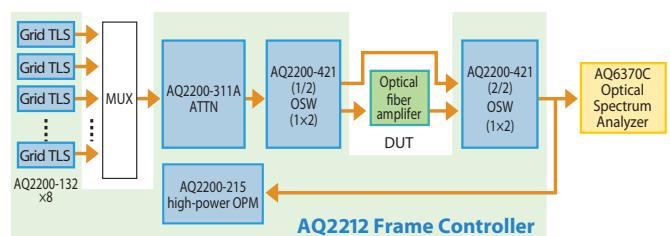

Transceiver Measurement System


The 10Gbit/s optical transceiver modules such as XFP or SFP+ are frequently used in transmission systems and Ethernet systems. The measuring system for such modules requires many instruments including power supplies, multi-meters and the signal generators to control optical transceiver modules. The AQ2200 Multi Application Test System allows for building a space saving test system with a variety of plug-in modules.

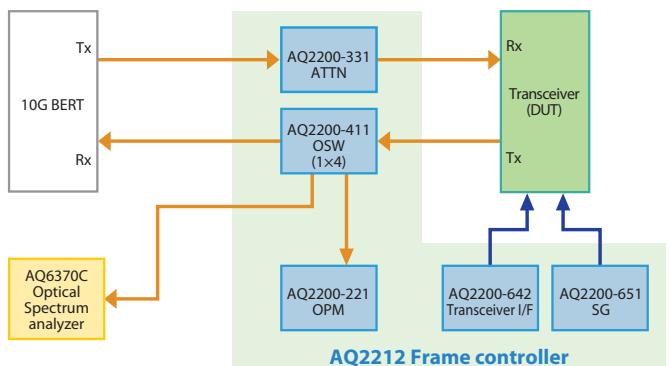

GE-PON Test System

To evaluate GE-PON systems used for FTTH networks, optical characteristics and IP traffic tests are performed. Since a GE-PON consists of OLTs and multiple ONUs, efficient measurement of multiple ports is required. Utilizing the multiple port AQ2200-4xx optical switch makes it possible to build an efficient automated

measurement system by distributing the signal in a custom test network. Since the AQ2200-331 Optical Attenuator is equipped with an optical power meter, the ONU optical receiving level can be adjusted without changing the fiber connection.

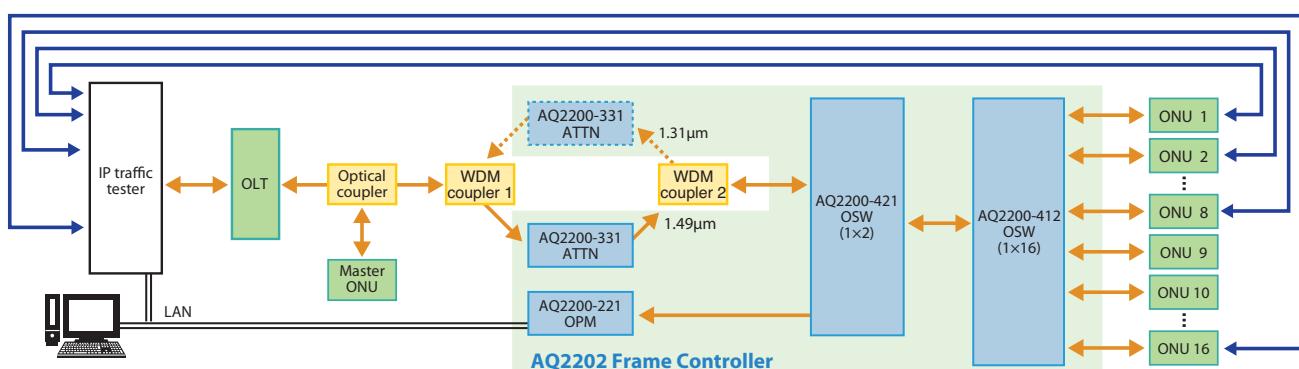

Product Specifications

Frame Controller (AQ2211/2212)

Items		Specifications	
Product name	AQ2211	AQ2212	
Number of slots	3	9	
Display	Color LCD, 320x240 dot		
	IEEE-488 compatible, protocol: IEEE-488.2 compatible		
	IEEE802.3 compatible, connector: RJ-45x1, transmission method: Ethernet (100BASE-TX), protocol: TCP/IP		
Remote interface	USB	USB Rev1.1 compatible, connector: USB type Bx1, protocol: USB-TMC	
	Ethernet	USB (USB Rev2.0 compatible, connector: USB type Ax1, applicable device: USB mass storage class flash memory)	
	GPIO	BNC connector	
External storage interface		Stability, Logging, Swept, Optical return loss (ORL)	
Functions	Preset applications	Macro programming, Multi-user, Remote viewer support	
	Control functions		
Operation environment	Ambient temperature	5 to 40°C	
	Ambient humidity	20 to 80% RH (no condensation)	
Storage environment	Ambient temperature	-20 to 60°C	
	Ambient humidity	20 to 80% RH (no condensation)	
Power requirement		100 to 240Vac, 50/60Hz	
Power Consumption (including modules)	170VA	580VA	
Dimension (excluding protrusions)	Approx. 212 (W) x 132.5 (H) x 400 (D) mm	Approx. 425 (W) x 132.5 (H) x 500 (D) mm	
Mass	Approx. 6kg	Approx. 11kg	

DFB-LD Module (AQ2200-111)

Item	Product Specs	
Center wavelength	1310 ±10 nm, 1490 ±10 nm	
Wavelength accuracy	1310 nm, 1490 nm: Within ±0.05 nm	
Wavelength setting resolution	0.001 nm	
Spectral linewidth	Narrow	5 MHz (typical)
	Wide	100 MHz (typical)
Optical output level	+10 dBm or more	
SMSR	1310 nm, 1490 nm: 30 dB or more	
Output level stability	15 minutes: ±0.005 dB or less 24 hours: ±0.03 dB or less	
Optical attenuation range	10 dB (0.01 dB step)	
Wavelength stability	15 minutes	±0.005 nm or less
	24 hours	±0.01 nm or less
Wavelength adjustment range	1.6 nm or more	
RIN	-145 dB/Hz (typical)	
Internal modulation function	Available	
Applicable optical fiber	Select any of SMF (ITU-T G.652) or PMF	
Optical connector	FC/Angled PC	
Laser safety standard class	Class 1M (IEC 60825-1:2007)	

Grid TLS module (AQ2200-131 / -132)

Items	Product Specs			
Product name	AQ2200-131, AQ2200-132			
Number of channel	AQ2200-131: 1, AQ2200-132: 2			
Device type	Standard type		Advanced type	
Frequency band	C-Band	L-Band	C-Band	L-Band
Frequency (Wavelength) range	196.10 to 191.70 THz (1528.77 to 1563.86 nm)	190.90 to 186.50 THz (1570.42 to 1607.47 nm)	196.25 to 191.50 THz (1527.60 to 1565.50 nm)	190.95 to 186.35 THz (1570.01 to 1608.76 nm)
Grid spacing	100 GHz, 50 GHz		100 GHz, 50 GHz, 25 GHz and Manual (min. 0.1 GHz)	
Frequency (Wavelength) setting resolution	—		0.1 GHz (0.8 pm@1550nm)	0.1 GHz (0.8 pm@1590nm)
Frequency (Wavelength) fine turning range	—		± 6 GHz (typical)(± 48 pm@1550nm)	± 6 GHz (typical)(± 51 pm@1590nm)
Absolute frequency (Wavelength) accuracy	± 2.5 GHz (± 20 pm@1550 nm)	± 2.5 GHz (± 21 pm@1590 nm)	± 2.5 GHz (± 20 pm@1550nm)	± 2.5 GHz (± 21 pm@1590nm)
Frequency (Wavelength) stability(@24 hours, ±0.5°C)	± 0.3 GHz (typical)(± 2.4 pm@1550nm)	± 0.3 GHz (typical)(± 2.5 pm@1590nm)	± 0.3 GHz (typical)(± 2.4 pm@1550nm)	± 0.3 GHz (typical)(± 2.5 pm@1590nm)
Frequency (Wavelength) tuning time	30 sec. or less		30 sec. or less	
Optical output level	+ 12 dBm or more	+ 9 dBm or more	+ 12.5 dBm or more	
Output level stability	± 0.03 dB (typical)(@24h, ±0.5°C)		± 0.03 dB (typical)(@24h, ±0.5°C)	
Attenuation range	4 dB (resolution: 0.1 dB(typical))		6 dB (resolution: 0.01 dB(typical))	
Spectral linewidth	3 MHz (typical)		100 kHz (typical)	
SMSR	45 dB (typical)		45 dB (typical)	
RIN	-135 dB/Hz (typical)	-130 dB/Hz (typical)	-145 dB/Hz (typical)	
Applicable optical fiber	PANDA PMF (Slow axis, in line with connector key)		PANDA PMF (Slow axis, in line with connector key)	
Optical connector	Select any of FC/PC or FC/Angled PC		Select any of FC/PC or FC/Angled PC	
Dither function	—		Available	
Laser safety standard class	Class 1M (IEC 60825-1: 2007)		Class 1M (IEC 60825-1: 2007)	

Sensor Module (AQ2200-215/-221/-231)

Items	Product Specs	
Product name	AQ2200-215	AQ2200-221
Number of channels	1	2
Detector type	InGaAs	InGaAs φ3 mm
Wavelength range	970 to 1660 nm	800 to 1700 nm
Power range (CW light)	-70 to +30 dBm	-70 to +10 dBm
Applicable fiber type	≤62.5/125 μm (GI), NA ≤0.275	
Uncertainty Under reference conditions	±3%	
Total uncertainty	±5.0% ±2.0 nW	±5.0% ±50 pW
Polarization dependence	0.03 dBp-p (typical)	0.02 dBp-p (typical)
Linearity	±0.05 dB ±2.0 nW	±0.02 dB ±50 pW
Noise level	2.0 nW or less	50 pW or less
Averaging time (min.)	100 μs	200 μs
Optical connector	AQ9335C (*) connector adapter	

*For details, please refer to the Data sheet (AQ2200-21EN Data sheet).

ATTN module (AQ2200-311A/331)

Items		Product Specs			
Product name		AQ2200-311A		AQ2200-331	
Wavelength range		1200 to 1700 nm		800 to 1370 nm	
Insertion loss		1.0 dB (typical) 1.6 dB or less		1.9 dB (typical) 2.3 dB or less	
Max. attenuation		60dB		45 dB	
Attenuation accuracy		±0.1 dB or less		—	
Repeatability		±0.01 dB or less		—	
Monitor power meter accuracy		—		±5% or less	
Optical return loss (when selecting PC connector)		45 dB or more		20 dB or more	
Polarization dependence		0.08 dBp-p or less		—	
Max. input power		—		+23 dBm	
Shutter isolation		90 dB or more		—	
Applicable optical fiber [*1]		SMF (ITU-T G.652)		MMF (62.5/125)(IEC 60793-2)	
Optical connector		—		Select any of FC/PC or SC/PC	
Monitor port option		—		—	
Monitor port output		-13 dB (typical)		—	
Insertion loss		2.3 dB or less		—	
Polarization dependence		0.1 dBp-p or less		—	

[*1] Other fiber types not listed are available on request (i.e. GI50).

OSW Module (AQ2200-411/-412/-421)

Items		Product Specs			
Product name		AQ2200-411			
Port configuration	1x4	1x8	1x4	1x8	AQ2200-412
Number of switch	1	—	1	—	1x16
Wavelength	1310 nm/1550nm	850 nm/1300 nm	—	1310 nm/1550 nm	850 nm/1310 nm
Insertion loss	—	—	—	1 dB (typical) 1.4 dB or less	—
Reproducibility	—	—	—	±0.01 dB or less	—
Crosstalk	-60 dB or less	-50 dB or less	-60 dB or less	-50 dB or less	—
Return loss	45 dB or more	20 dB or more	45 dB or more	45 dB or more	20 dB or more
Polarization dependence	0.08 dBp-p or less	—	—	0.08 dBp-p or less	—
Applicable optical fiber [*1]	SM (ITU-T G.652)	MMF (62.5/125) (IEC 60793-2)	—	SM (ITU-T G.652)	MMF (62.5/125) (IEC 60793-2)
Optical connector	—	—	—	Select any of FC/PC or SC/PC	—

[*1] Other fiber types not listed are available on request (i.e. GI50).

SG Module (AQ2200-651)

Items		Product Specs			
RF OUT (CH1-CH5)	Frequency range	620.0 to 720.0 MHz (when the rate is 1/1) 155.0 to 180.0 MHz (when the rate is 1/4)			
	Frequency resolution	1 Hz			
	Frequency accuracy	±2.0 ppm (when using the internal oscillator) Depends on the signal received by 10 MHz REF IN (when using an external reference signal)			
	Output	Amplitude	0.8 Vp-p ± 0.2 Vp-p, 1.3 Vp-p ± 0.2 Vp-p		
		Waveform	Rectangular		
	Duty	50% ± 10%	—		
	Terminator condition	50 Ω AC-coupling	—		
10MHz REF IN	Connector	SMA, female	—		
	Input	Frequency range	10 MHz ± 2.0 ppm		
		Amplitude	0.3 Vp-p to 1.2 Vp-p		
		Duty	50% ± 10%		
		Absolute max. rating	1.5 Vp-p		
10MHz REF OUT	Connector	Terminator condition	50 Ω AC-coupling		
		Frequency range	10 MHz ± 2.0 ppm (when using the internal oscillator) Depends on the signal received by 10 MHz REF IN (when using an external reference signal)		
		Amplitude	0.8 Vp-p ± 0.2 Vp-p		
		Terminator condition	50 Ω AC-coupling		
		Connector	SMA, female		

Transceiver I/F module (AQ2200-642)

●Monitoring Specifications

Items	Rating		Measurement Range		Resolution	Accuracy	
	Upper	Lower	Upper	Lower			
Power supply voltage monitor	PS1 PS2 PS3 PS4 PS5	+7.5 V +7.5 V +7.5 V -7.5 V +7.5 V	-0.5 V -0.5 V -0.5 V +0.5 V -0.5 V	+6 V +4 V +2.5 V -2 V +6 V	+2 V +2 V +0.5 V -6 V +2 V	1 mV	± (0.2% of reading + 1 mV)
Power supply current monitor	PS1 PS2 PS3 PS4 PS5	—	—	1.8 A 3 A 1.8 A 3 A 2 A	0 A 0 A 0 A 0 A 0 A	1 mA	± (1% of reading + 2 mA)
Status signal monitor	AIN1 AIN2 AIN3 AIN4 AIN5 AIN6	+7.5 V	-0.5 V	+6 V	+0V	0.01 V	± (1% of reading + 20 mV)
Resistance value monitor	R1	—	—	10000 Ω	0 Ω	1Ω	± (0.5% of reading + 2 Ω)
Power consumption monitor	PSPOWER	—	—	28 W	0 W	0.1 W	See the values for the voltage and current monitors.

●Power Supply Specifications

Name	Voltage Range	Current Limit Range
PS1	+4.750 to +5.250 V	0.10 to 1.80 A
PS2	+3.135 to +3.465 V	0.10 to 3.00 A
PS3	+0.800 to +1.890 V	0.10 to 1.80 A
PS4	-5.460 to -4.940 V	0.10 to 3.00 A
PS5	5.0 or 3.3 V	0.10 to 1.00 A (when 5.0 V is selected) 0.10 to 2.00 A (when 3.3 V is selected)

Ordering Information

AQ2211 Frame Controller

Model	Suffix	Specifications
735101	—	
	-D	UL / CSA standard
	-F	VDE standard
	-R	AS standard
	-Q	BS standard
	-H	GB standard

AQ2212 Frame Controller

Model	Suffix	Specifications
735102	—	
	-D	UL / CSA standard
	-F	VDE standard
	-R	AS standard
	-Q	BS standard
	-H	GB standard

AQ2200-111 DFB-LD Module

Model	Suffix	Specifications
810518901	—	
	-W1310	1310 nm ¹
	-FCA	FC / Angled PC
	-P20	Optical output 20mW
	-P10	Optical output 10mW
	-SMF	SM fiber
	-PMF	PM fiber
	-MODN	Without external modulation
	-MODS	External modulation (SINE)
	-MODC	External modulation (CHOP)

*1 Please consult our sales representatives as to 1490 nm.

AQ2200-131 Grid TLS module

Model	Suffix	Specifications
AQ2200131	—	
	-C	C-band
	-L	L-band
	-T2	Advanced type
	-T4	Standard type
	-PA	PMF
	-FCC	FC/PC connector
	-FCA	FC/Angled connector

AQ2200-132 Grid TLS module

Model	Suffix	Specifications
AQ2200132	—	
	-CC	Ch1: C-band, Ch2: C-band
	-LL	Ch1: L-band, Ch2: L-band
	-CL	Ch1: C-band, Ch2: L-band
	-T2	Advanced type
	-T4	Standard type
	-PA	PMF
	-FCC	FC/PC connector
	-FCA	FC/Angled connector

AQ2200-215 Sensor Module

Model	Suffix	Specifications
735125	—	
	-NON	Without optical connector adapter
	-FCC	AQ9335C (FC) connector adapter (with a light shielding cap)
	-SCC	AQ9335C (SC) connector adapter (with a light shielding cap)
	-LCC	AQ9335C (LC) connector adapter (with a dust protection cap)
	-MUC	AQ9335C (MU) connector adapter (with a dust protection cap)

AQ2200-221 Sensor Module

Model	Suffix	Specifications
735122	—	
	-NON	Without optical connector adapter
	-FCC	AQ9335C (FC) connector adapter (with a light shielding cap)
	-SCC	AQ9335C (SC) connector adapter (with a light shielding cap)
	-LCC	AQ9335C (LC) connector adapter (with a dust protection cap)
	-MUC	AQ9335C (MU) connector adapter (with a dust protection cap)

AQ2200-311A ATTN Module

Model	Suffix	Specifications
735131	—	
	-SA	Optical fiber: SMF
	-G6	Optical fiber: MMF (62.5 / 125)
	-FCC	Optical connector: FC / PC
	-SCC	Optical connector: SC / PC
	/MON	Monitor port

AQ2200-331 ATTN Module

Model	Suffix	Specifications
735133	—	
	-SA	Optical fiber: SMF
	-G6	Optical fiber: MMF (62.5 / 125)
	-FCC	Optical connector: FC / PC
	-SCC	Optical connector: SC / PC

AQ2200-411 OSW Module

Model	Suffix	Specifications
735141	—	
	-04	Port configuration: 1x4
	-08	Port configuration: 1x8
	-SA	Optical fiber: SMF
	-G6	Optical fiber: MMF (62.5 / 125)
	-FCC	Optical connector: FC / PC
	-SCC	Optical connector: SC / PC

AQ2200-412 OSW Module

Model	Suffix	Specifications
735143	—	
	-16	Port configuration: 1x16
	-SA	Optical fiber: SMF
	-FCC	Optical connector: FC / PC
	-SCC	Optical connector: SC / PC

AQ2200-421 OSW Module

Model	Suffix	Specifications
735142	—	
	-21	Port configuration: Dual 1x2
	-22	Port configuration: Dual 2x2
	-SA	Optical fiber: SMF
	-G6	Optical fiber: MMF (62.5 / 125)
	-FCC	Optical connector: FC / PC
	-SCC	Optical connector: SC / PC

AQ2200-642 Transceiver I/F Module

Model	Suffix	Specifications
735162	—	

AQ2200-651 SG Module

Model	Suffix	Specifications
735163	—	

Accessories

Product Name	Model	Specifications
AQ2200-901 blank panel	810518926	1 slot size
Rackmount kit for AQ2211	735182-03	For AQ2211 left-side mounting
Rackmount kit for AQ2212	735182-09	For AQ2212 mounting
AQ9335C (FC) connector adapter	810518909-FCC	FC connector for AQ2200-215 / -221
AQ9335C (SC) connector adapter	810518910-SCC	SC connector for AQ2200-215 / -221
AQ9335C (LC) connector adapter	M3407JD	LC connector for AQ2200-215 / -221 with a dust protection cap
AQ9335C (MU) connector adapter	M3407JE	MU connector for AQ2200-215 / -221 with a dust protection cap
Light shielding cap (FC)	810518912-FCC	Light shielding cap for FC connector
Light shielding cap (SC)	810518913-SCC	Light shielding cap for SC connector
Dust protection cap (LC)	M3407HD	Dust protection cap for LC connector
Dust protection cap (MU)	M3407HE	Dust protection cap for MU connector

Ethernet is a registered trademark of Xerox Corporation. All other company names and product names mentioned herein are registered trademarks or trademarks of their respective holders.

Caution

When you export this product out of Japan, permission from the Japanese government may be required in accordance with the regulations of the foreign exchange and foreign trade laws.
The information contained herein is subject to change without prior notice in order to improve performance and quality.

YOKOGAWA 

YOKOGAWA METERS & INSTRUMENTS CORPORATION
Global Sales Dept. /Phone: +81-42-534-1413 Facsimile: +81-42-534-1426
E-mail: tm@cs.jp.yokogawa.com

YOKOGAWA CORPORATION OF AMERICA Phone: (1)-770-253-7000, Fax: (1)-770-254-0928
YOKOGAWA EUROPE B.V. Phone: (31)-88-4641000, Fax: (31)-88-4641111
YOKOGAWA ENGINEERING ASIA PTE. LTD. Phone: (65)-62419933, Fax: (65)-62412606

Subject to change without notice.
[Ed : 02/b] Copyright ©2011
Printed in Japan, 211(KP)