

This manual explains how to use additional option licenses to add options to a DLM5000 mixed signal oscilloscope. To ensure correct use, please read this manual thoroughly before beginning operation.

Contents of the Package

The following items are included in the package. If the wrong items have been delivered or if items are missing, contact your nearest YOKOGAWA dealer.

Item	Description	Quantity
Product Information Sheet	Contains the model and suffix code of the option license, the license key, and the instrument number of the DLM5000 that the option is to be added to. To add the option to the relevant product, the license key written on this sheet is necessary. Keep this sheet in a safe place.	1 sheet
Suffix Code Label	A label that proves that the option has been added to the relevant product. After adding the option, be sure to affix this label on the relevant product.	1 sheet
User's Manual	This manual.	1 sheet

Products That Options Can Be Added To

The options that you purchase can be added to DLM5000.

Models	DLM5034, DLM5038, DLM5054, DLM5058
Firmware version	Version supporting the option to be added

Installing an Option

Checking the Product That the Option Will Be Added To


1. Check that the instrument number of the DLM5000 that you want to add the option to matches the instrument number written on the Product Information sheet.
If you try to add an option to a DLM5000 with a different instrument number, an error will appear in step 7.

Starting the DLM5000

2. Turn on the DLM5000 power switch to start the DLM5000.
For details on how to turn on the power switch, see in the DLM5000 Getting Started Guide (IM DLM5058-03EN).


UTILITY Overview Menu

3. Press **UTILITY** and then the **Overview** soft key to display the following menu.

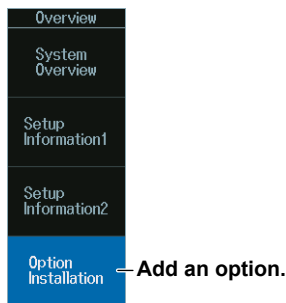

Adding an Option

4. Press the **Option Installation** soft key to display the following screen.

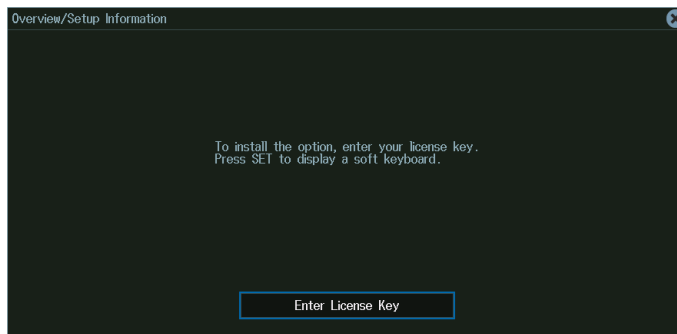


5. Press **SET** (●) to display a soft keyboard.



6. Using the soft keyboard, enter the license key correctly.
 - The license key is written on the Product Information sheet.
 - The DLM5000 screen is a touch panel. You can tap the keyboard to enter the license key. You can also enter the license key by connecting a USB keyboard or USB mouse to a DLM5000 USB port (type A) for connecting peripheral devices. For details, see in the DLM5000 Getting Started Guide (IM DLM5058-03EN).
7. Press the **Enter** soft key. The additional option will be installed.

If an error appears, check the following items.


 - If the instrument number of the DLM5000 that you are trying to add the option to does not match the instrument number written on the Product Information sheet, you cannot install the option.
 - If the instrument numbers are matched, press **ESC** to clear the error, install the option again from step 5 on the previous page, and enter the license key correctly.
 - If the instrument numbers are matched and you enter the license key correctly but an error still appears, contact your nearest YOKOGAWA dealer.

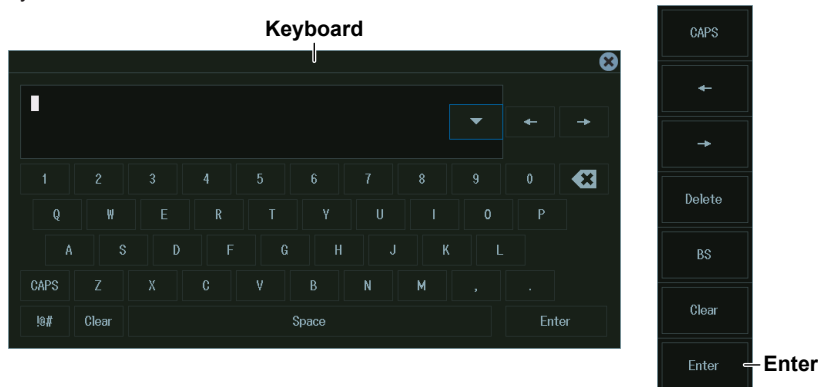

CAUTION

Do not turn off the DLM5000 until the following screen appears after you press Enter soft key. If the DLM5000 is turned off during this period, the DLM5000 may no longer start, or option and other information may be lost.

When the option is installed successfully, the following screen appears.

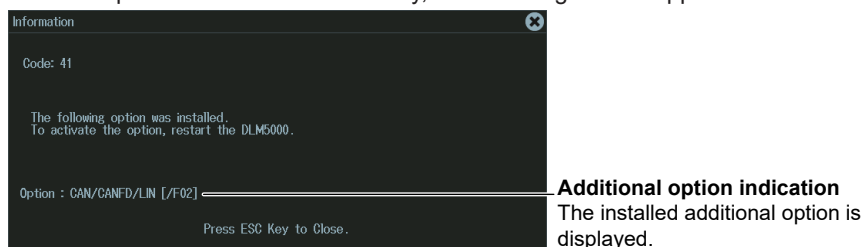

Additional option indication
The installed additional option is displayed.

Restarting the DLM5000

8. Restart the DLM5000. The additional option will be activated.

Viewing the System Information

To verify that the option has been added, view the system information on the DLM5000 overview screen. You can show the overview screen by pressing the **System Overview** soft key in step 3 on the previous page.

Note

The SUFFIX (suffix code) inscribed in the DLM5000 name plate indicates the installed options at the time of factory shipment. After adding options, check the options on the DLM5000 overview screen.

Affixing the Suffix Code Label

Be sure to affix the suffix code label (included with the Product Information sheet) to the DLM5000 that you have added an option to. Before affixing the label, wipe the surface clean with a clean dry cloth.

Note

If the suffix code label is not affixed and we need to update the firmware of the relevant product during repairs or other services at our factory, we may not be able to return your product with the added option installed.

